
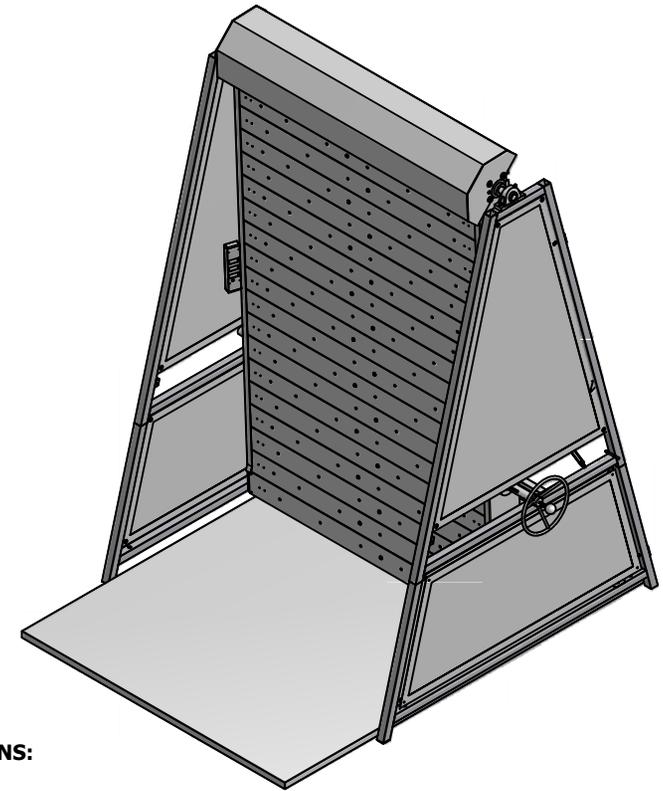
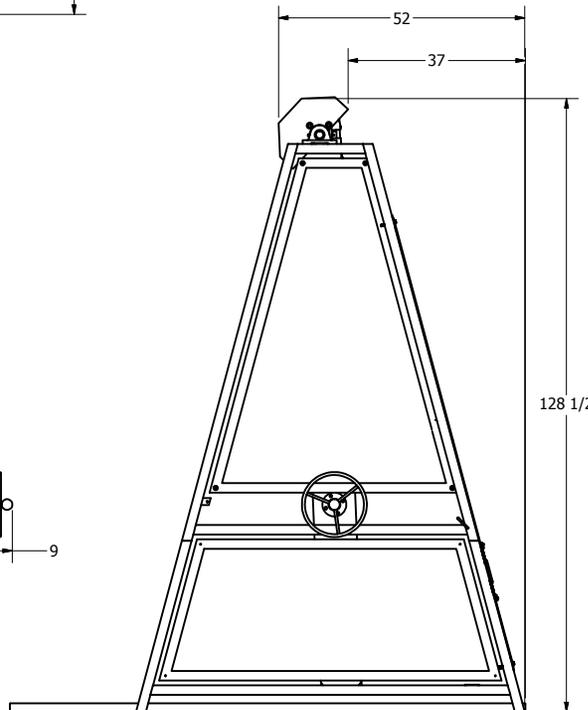
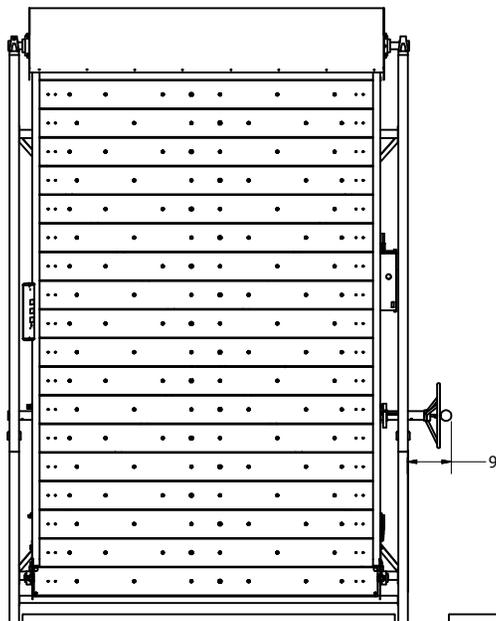


# Treadwall® M6 Freestanding

The Treadwall M6x11 Freestanding is the largest and most popular Treadwall model. It has a generously sized climbing surface - 6 foot wide by 9 foot high that encourages sideways as well as upward movement. The wall's rotation is powered by the climber's weight - no motors are used. The angle of the surface is adjusted by a wheel that can be mounted on either side. A simple rotary control adjusts the speed to suit the user, and a patented auto-stop<sup>(tm)</sup> mechanism matches the movement of the wall to the climber's movements, gently braking when the climber's feet are at the bottom panel. The standard M6x11 Treadwall is designed to fit under an 11 foot ceiling. See the optional M6x10 units for lower ceilings.

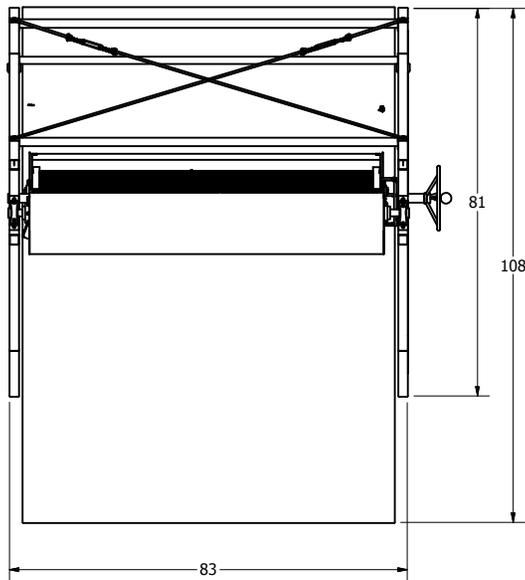

## SPECIFICATIONS:

Specifications

Weight: 1250 pounds.

Construction: Steel framework with custom-machined wood panels.

Placement: Inside standard - outside with exterior upgrade.

Width of climbing surface: 6 feet.

Total length of climbing surface: 20 feet.

Number of possible hold placements: 280.

Angle range: positive 14 degrees to negative 14 degrees (overhanging).

Mode of control: Electro-hydraulic braking and resistance.

Electrical requirements: 12 VDC (1500ma) Plug-in transformer (supplied) or battery used.

Electronic Display: Measures distance (feet or meters), time and calories.

Time and distance goals can be pre-set.

Color - frame: Silver Gray is standard. Custom colors available.

Color - panels: Charcoal Gray textured panels are standard. Optional Natural Birch panels available.

Holds: Set of 40 custom training holds in 3 color groups, with complementary 14 ladder Line<sup>(tm)</sup> holds.

Maximum hold size: 2.5 inches high by 6 inches wide.

Floor Mat: 8 feet x 6 feet custom mat, 1.25 inches dual foam, locking loops, black 14 oz. vinyl cover.

Warranty: 10 years on structural parts, 1 year on moving parts.

See full warranty for details.